
## ROBAM | Rangehood



#### CXW-200-A818

Motor Power 200W Unrestricted Air Flow 1980m³/hr Noise Level ≤57.5dB Grease Separation Rate ≥96% Dimension (WxDxH) 895x504x(652~952)
























## **Technical Specification**

| CXW-200-A818                 | Dimensions (WxLxH)  | 895x504x(652~952)mm   |
|------------------------------|---|---|
| 220 <b>-</b> 240V ~ 50Hz     | Input Power of Unit   | 204W  |
| 1980m³/hr                    | Maximum Motor Power   | 200W  |
| 1140m³/hr                    | Maximum Light Power   | ≤4W   |
| ≥350Pa                       | Net Weight of Unit  | 26kg  |
| ≥280Pa                       | Odour Decrease Rate (Instantaneous)   | ≥80%  |
| ≤57.5dB(A)                   | Odour Decrease Rate (Normal)  | ≥98%  |
| Cooktop: 650mm<br>BBQ: 800mm | Grease Separation Rate  | ≥96%  |
|                              | 220-240V ~ 50Hz<br>1980m³/hr<br>1140m³/hr<br>≥350Pa<br>≥280Pa<br>≤57.5dB(A)<br>Cooktop: 650mm | 220-240V ~ 50Hz  Input Power of Unit  1980m³/hr  Maximum Motor Power  1140m³/hr  Maximum Light Power  ≥350Pa  Net Weight of Unit  ≥280Pa  Odour Decrease Rate (Instantaneous)  ≤57.5dB(A)  Odour Decrease Rate (Normal)  Cooktop: 650mm  Grease Separation Rate |

#### Note:

### **Control Panel**

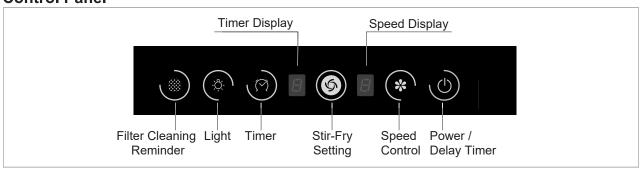

#### **Accessories**

| Name             | Quantity | Name                      | Quantity  |
|------------------|----------|---------------------------|-----------|
| Rangehood        | 1 piece  | ST4x18 Self Tapping       | 10 pieces |
|                  |          | Screws                    |           |
| Non-Return Valve | 1 set    | ST4.8x50 Timber Screws    | 4 pieces  |
| Valve Seal       | ]        | Solid Wall Plug           | 4 pieces  |
| Valve connector  | ]        | M6 Solid Wall Anchor      | 1 piece   |
| Wall Bracket     | 1 piece  | Stopper Foot              | 1 piece   |
| Oil Cup          | 1 piece  | Semi-Rigid Duct with Tape | 1 piece   |
| User Manual      | 1 piece  | Reducing Collar           | 1 piece   |

<sup>1.</sup> Airflow rating in accordance with European Standard EN61591 Ø150, 175

<sup>2.</sup> The deviation between expressed value of air volume or maximum static pressure and measured value shall not be larger than 10% of the expressed value

# ROBAM | Rangehood

